

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 937 961 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
25.08.1999 Bulletin 1999/34

(51) Int Cl.⁶: G01B 5/00

(21) Application number: 99301102.2

(22) Date of filing: 16.02.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Davies, Philip Andrew
Cambridge CB1 3QJ (GB)

(74) Representative: Fenlon, Christine Lesley
Haseltine Lake & Co.,
Imperial House,
15-19 Kingsway
London WC2B 6UD (GB)

(30) Priority: 20.02.1998 GB 9803716

(71) Applicant: Melles Griot Limited
London W1N 9AF (GB)

(54) Positioning mechanism

(57) A mechanism for a multi-axis flexure positioner includes a fixed part and a movable part (7), the movable part (7) being connected to the fixed part via a plurality of transmission means, one for each axis, for transmitting actuation forces for the respective axes to the movable part (7). The transmission means for each axis includes a flexure member (2,3,8) arranged to transmit actuation forces for that axis to the movable part (7) and to flex between the fixed part and the movable part in

response to actuation forces associated with the or each other axis. There are three flexure members (2,3,8) arranged to extend along three mutually-perpendicular axes so that each flexure member (2,3,8) is flexible along the axes of extent of the other two flexure members (2,3,8). Each of the three flexure members (2,3,8) comprises a pair of flexure linkages arranged to extend parallel to each other, the three pairs of linkages thus defining three mutually-perpendicular planes.

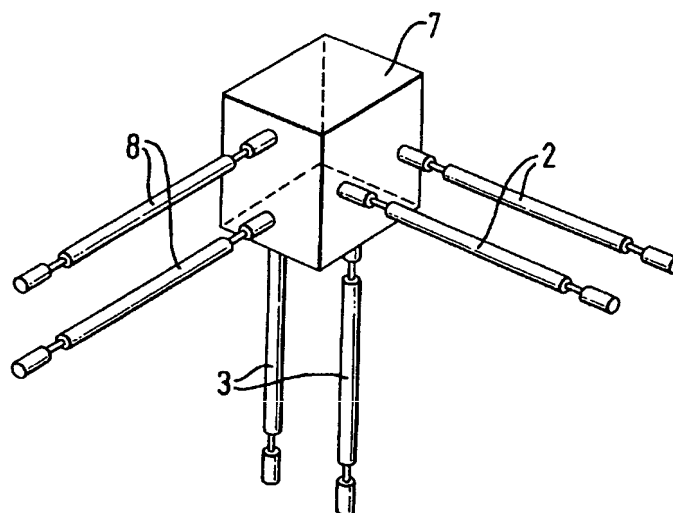


FIG.1

EP 0 937 961 A2

Description

[0001] This invention relates to a mechanism for a positioner and to a positioner having such a mechanism, more especially to a multi-axis positioning mechanism.

[0002] Positioners have many scientific and industrial applications.

[0003] One application, for example, is the positioning of optical fibres relative to each other, relative to waveguides, laser diodes, detectors etc, prior to testing and joining. This type of positioning has to be very precise, typically of sub-micron precision, and is commonplace in research and production facilities in the telecommunications industry.

[0004] Another application is for positioning optical or non-optical components, such as mirrors, lenses or samples beneath microscopes.

[0005] There are two main types of precision positioning stage, those based on bearings and those based on flexure hinges. The simplest form of both types of design produce linear motion, so called x-positioners. Both types of design can however be adapted to produce rotary motion with additional linkages and the like, so called θ -positioners.

[0006] Many applications require not one, but several, axes of motion. This is obtained by stacking several stages. For example, bolting the top plate of one bearing stage to the base of another linear stage so that the respective positioning axes are at right angles to each other will produce a two-axis positioner, or so-called xy-positioner. Moreover, by then bolting an L-bracket onto the top-plate of the y-stage and a further bearing stage onto the upright of the L-bracket, a three-axis positioner, or so-called xyz-positioner, is produced.

[0007] Sometimes multi-axis positioners are supplied as integrated units. For example, in an xy-positioner, the top plate of the x-stage can also serve as the base plate of the y-stage, to reduce size and weight.

[0008] Flexure stages can also be nested in various ways to make them more compact.

[0009] However, the integration of parts in this way does not affect the basic principle of operation which is to use a number of similar mechanisms connected serially.

[0010] There are however several drawbacks to the use of a series of single axis mechanisms for multi-axis positioners:

1. The complexity and cost tends to increase with the number of axes.
2. The mass of moving parts increases with the number of axes, making the positioner slower to respond and more susceptible to ambient vibrations.
3. The force of adjusting a micrometer (other than that of the first stage) is transmitted through the preceding stages, causing disturbance to the position of the stages.
4. The stiffness of the positioner decreases as the

number of axes increases.

[0011] According to the present invention there is provided a mechanism for a multi-axis flexure positioner, the mechanism including a fixed part and a movable part, the movable part being connected to the fixed part via a plurality of transmission means, one for each axis, for transmitting actuation forces for the respective axes to the movable part, the transmission means for each axis including a flexure member arranged to transmit actuation forces for that axis to the movable part and to flex between the fixed part and the movable part in response to actuation forces associated with the or each other axis, wherein there are three flexure members arranged to extend along three mutually-perpendicular axes so that each flexure member is flexible along the axes of extent of the other two flexure members, each of the three flexure members comprising a pair of flexure linkages arranged to extend parallel to each other, the three pairs of linkages thus defining three mutually-perpendicular planes.

[0012] Preferred embodiments of the invention incorporate up to six axes of motion into a positioning mechanism of this kind. Once fitted with actuators, such as micrometers, the positioning mechanism forms a multi-axis positioner, preferably a micropositioner, with a corresponding number of axes of motion.

[0013] In the preferred embodiments, the movable block of the positioner is supported by six linkages, each linkage being thinned towards each end to give the linkage flexibility to bend in two directions and to twist about its axis of extent.

[0014] The new design allows multi-axis positioners to be made which have one or more of the following advantages:

1. Low mass of moving parts - better response time, more resistance to ambient vibrations.
2. Adjusting a micrometer, or other actuator, for one axis does not result in force being transmitted through the mechanics of the stage and disturbing the positions set by the or each other stage.
3. Greater stiffness resulting from the parallel rather than serial action of the linkages.
4. Because there are fewer parts in series, lost motion among adjacent parts is minimized and the overall precision is improved.
5. Simpler design, lower cost.

[0015] These advantages become more significant as the number of axes increases.

[0016] A sub-micron positioning precision is achievable.

[0017] Further aspects of the invention are exemplified by the attached claims.

[0018] For a better understanding of the invention, and to show how the same may be carried into effect, reference will now be made, by way of example, to the

accompanying drawings, in which:-

Fig. 1 is to illustrate the principles of operation of the positioning mechanisms of first and second embodiments of the invention and shows schematically a movable block and three pairs of linkages;

Fig. 2 shows a linkage used in the first and second embodiments of the invention;

Fig. 3 is to illustrate the principles of operation of the positioning mechanism of the first embodiment of the invention, which is an xyz-positioning mechanism, and shows schematically a movable block, one pair of linkages, a hinged plate and an actuator; Figs. 4 to 6 are scale technical drawings of the positioning mechanism of the first embodiment, being arranged on a single sheet of the drawings in third angle projection, Fig. 4 being a plan view, i.e. along the z-axis, Fig. 5 a side view along the x-axis and Fig. 6 a side view along the y-axis;

Figs. 7, 8 and 9 are scale technical drawings respectively through sections 'AA', 'BB' and 'CC' of Fig. 4, also showing actuators fitted to the positioning mechanism;

Fig. 10 is a scale technical drawing through section 'DD' of Fig. 6, also showing actuators fitted to the positioning mechanism;

Fig. 11 is to illustrate the principles of operation of the positioning mechanism of the second embodiment of the invention and shows schematically a movable block, one pair of linkages, a pivot plate and two actuators, one for linear motion and one for rotary motion;

Fig. 12 defines, for the second embodiment, the geometrical relationship between the three linear degrees of freedom, namely X, Y & Z, the three rotary degrees of freedom, namely ROLL, PITCH & YAW, and the common pivot point, P, of the rotary degrees of freedom;

Figs. 13 to 15 are scale technical drawings of the positioning mechanism of the second embodiment, with actuators fitted, Fig. 13 being a plan view, i.e. along the z-axis, Fig. 14 a side view along the x-axis and Fig. 15 a side view along the y-axis;

Fig. 16 is a plan view corresponding to Fig. 13, but in partial section to show parts of the positioning mechanism relating to the X & YAW and Y & ROLL axes;

Fig. 17 is a side view corresponding to Fig. 14, but in partial section to show parts of the positioning mechanism relating to the X & YAW and Y & ROLL axes;

Fig. 18 is a side view corresponding to Fig. 14, but in partial section to show parts of the positioning mechanism relating to the Y & ROLL axes and Z & PITCH axes;

Fig. 19 is a plan view corresponding to Fig. 13, but in partial section to show parts of the positioning mechanism relating to the Z & PITCH axes; and

Fig. 20 is a side view corresponding to Fig. 15, but in partial section to show parts of the positioning mechanism relating to the Y & ROLL axes and Z & PITCH axes.

[0019] Fig. 1 is to illustrate the principles of operation of the positioning mechanisms of embodiments of the invention.

[0020] A movable block 7 is shown supported in space by three pairs of linkages 8, 2 and 3 via which the block 7 is moved in use. The three pairs of linkages are arranged to extend along mutually orthogonal axes x, y and z respectively. Moreover the ones of each pair of linkages extend parallel to each other, so that each pair of linkages lies in a plane, this plane being perpendicular to the equivalent two planes in which the other two pairs of linkages lie. Before describing how the block 7 is moved in use, the design of the linkages is first described in more detail.

[0021] Each linkage needs to be rigid in respect of forces applied along an axis of extent of the linkage, referred to as lengthways in the following, but deformable in respect of forces applied across that axis of extent, referred to as sideways in the following. Consequently, a force applied to one end portion of the linkage substantially lengthways will be transmitted to the other end portion of the linkage, whereas a force applied to one end portion of the linkage sideways will not be transmitted to the other end of the linkage, but rather accommodated by lateral deformation of the linkage. That is, the linkage has a relatively high stiffness along its extent combined with a relatively low shear stiffness in respect of shear across its extent in at least one, but preferably all, lateral directions. It is also preferable that the torsional stiffness be relatively low in embodiments, such as the second embodiment, where rotary motions are possible.

[0022] The linkage shown in Fig. 2 is the design chosen to provide the desired lengthways rigidity and lateral and torsional deformability in the embodiments of the invention. The linkage comprises two end portions 18 and 19 disposed on either side of a central portion 20, the central and end portions being interconnected by two flexible portions 21 and 22. The central and end portions 18 to 20 are made of sections of stainless steel rod of 3mm diameter. The central portion is around 25mm in length and the end portions 10mm. The flexible portions 21 and 22 are made of sections of music wire of 1mm diameter and are each around 15mm in free length with around 10mm at each end received in bores in the central and end portions and cemented in place by adhesive bonding, thus to leave a free length of the wire sections of around 10mm.

[0023] Music wire is chosen since it allows a large degree of elastic bending and torsion without reaching the plastic limit. Other spring steel elements, or other suitable elements with similar properties, could also be used.

[0024] Returning to Fig. 1, the linkages 2, 3 and 8 are arranged with their end portions 19 located in the movable block 7 and their end portions 18 arranged to receive respective actuation forces from respective actuators (not shown in Fig. 1), for example micrometers.

[0025] Thus, if, for example, both of the linkages 8 are displaced together equal distances, the block 7 will be translated in a horizontal direction. During the horizontal translation, the ends of the other linkages 2 and 3 remote from the block 7 are held fixed so that these linkages are subject to shear strain, as viewed along their respective axes of extent, which is accommodated by flexure of the flexible portions of the linkages.

[0026] As will now be appreciated, the above-described geometric arrangement in which the three pairs of linkages extend along mutually orthogonal axes x, y and z respectively, can only be precisely fulfilled for one position of the movable block 7, this one position being referred to in the following as the nominal position. Moreover, in the following, a general position of the block will be referred to as the set position.

[0027] The set position can thus be varied in use by adjusting the position of the end portions 18 of the linkages arranged remote from the block. For a given pair of linkages, movement of the end portions 18 through equal distances will produce translation of the movable block 7, as in the above-described example, and movement of the end portions 18 through different amounts will produce rotation of the block 7.

[0028] Six linkages provide the exact desired number of constraints to hold the block 7 rigidly in a set position, six is thus the preferred number of linkages. If there are fewer than six linkages, the block will not in general be held rigidly. If there are more than six linkages, some of the linkages provide redundant constraints and as a result residual forces exist within the system.

[0029] It is noted that in Fig. 1 the movable block 7 is illustrated as having the shape of a cube. This shape is chosen purely for ease of explanation. In reality, a cubic shape will not generally be the optimum shape, as will be appreciated further below. The movable block 7 may be a rigid body of any convenient shape.

[0030] In the following embodiments, the end portions 18 are attached to plates (not shown in Fig. 1) the mounting of which depends on the axes of motion required.

[0031] Fig. 3 shows, highly schematically, the plate mounting arrangement adopted in the first embodiment of the invention, this arrangement being suitable for providing a linear movement of the block 7, by causing the ones of a pair of the linkages 8 to move together equal distances.

[0032] In addition to the components shown in Fig. 1, Fig. 3 shows a plate 1 which is hingedly mounted relative to a case 13 via a hinge 15. The plate 1 need not literally have the form of a plate, but may be a rigid body of arbitrary shape arranged to rotate about a single axis in the manner of a hinge. The hinge axis is arranged to lie

along a line parallel to a line drawn between the points where the linkages 8 meet the plate 1. On the side of the plate facing towards the movable block 7, the end portions 18 of the linkages 8 are located by locating means 24. (The end portions 19 of the linkages are located by locating means 23 of the block 7). On the other side of the plate, i.e. the side facing away from the movable block 7, there is a contact region 25 at which a micrometer 14 acts via the end of its spindle 32. The micrometer is mounted on the case 13 by micrometer mounting means (not shown in Fig. 3). Although a micrometer is shown, the actuator may be of any type, for example motorised fine thread or piezoelectric.

[0033] A tension spring (not shown) holds the region 25 of the plate 1 in contact with the end of the micrometer spindle 32. The tension spring is connected at one end to the block 7 and extends through a through hole in the plate 1, being connected at its other end to a part of the case 13 located behind the plate 1. In use, the micrometer 14 moves the plate 1, in turn moving the pair of linkages 8, causing the block 7 to move in an approximately straight line parallel to the linkages 8. The movement does in fact have small arcuate components as a result of the geometrical constraints imposed by the other pairs of linkages 2 and 3, which must bend to accommodate movement of the linkages 8. This effect is analogous to the motion of a conventional one-axis flexure stage.

[0034] When three hinge plate mechanisms of the kind shown in Fig. 3 are used, a three-axis positioner can be provided, allowing movement of the block 7 in three linear directions X, Y, & Z.

[0035] In the arrangement shown in Fig. 3, motion is transmitted directly from the micrometer to the plate. It is however in some instances preferable for motion to be transmitted to the plate from the micrometer indirectly, such as by means of an intermediate crank or linkage. An example of an indirect drive of this kind is described further below for the z-transmission of the first and second embodiments. By contrast, the x- and y-transmissions in these embodiments are direct.

[0036] A practical example of a three-axis positioner according to the first embodiment is shown in Figs. 4 to 10 and will now be described. For ease of manufacture, the movable part of the positioner is made of two parts which are bolted together, namely block 7 and platform 6 which serves as a top plate on which the optical fibre, lens or whatever can conveniently be mounted. Because these parts are bolted together, they behave as one rigid body. The six flexible linkages are arranged in three pairs, namely flexible x-linkages 8, flexible y-linkages 2 and flexible z-linkages 3. It can be seen that the three pairs lie in mutually perpendicular planes. One end of each linkage is attached to the block 7. The other ends of the respective pairs of linkages are attached to respective ones of the hinged plates, namely hinged x-plate 1, hinged y-plate 4 and hinged z-plate 9.

[0037] If the x-micrometer 14 is displaced, the x-plate

1 moves about its hinge. The ends of the flexible x-linkages 8 attached to the plate 1 move through equal distances in the same direction as the micrometer axis, causing the movable part of the positioner 6 and 7 to move in the same direction also. The flexibility of the y- and z-linkages 2 & 3 allows this movement to occur over a range of travel which is a relatively small proportion of the linkage lengths. The travel in this example is limited to 4 mm on each axis. This relatively small range of travel is a common feature of all flexure stages.

[0038] The operation of the Y axis is similar to that of the X axis.

[0039] The operation of the Z (vertical) axis differs in that the motion is effectively cranked round by 90 degrees, so that the z-micrometer 12 can be mounted horizontally and not vertically. Additional parts, namely a hinged driver plate 11, on which bears the spindle 34 of the horizontally mounted z-micrometer 12, and a horizontally extending ball-ended linkage 10, interconnecting the driver plate 11 and the z-plate 9, are used to transmit the z-motion. The z-micrometer 12 can thus be positioned conveniently in terms of the detailed design. Alternatively, the z-micrometer could act directly on the hinged z-plate 9, similar to the X- and Y-micrometers, but in general this will be less convenient if the positioner is to be table mounted.

[0040] Fig. 11 shows, highly schematically, the plate mounting arrangement adopted in the second embodiment of the invention, this arrangement being suitable for providing linear and rotary movement of the block 7. This is achieved by providing an arrangement in which two actuators 14 and 114, shown as micrometers, act on a pivotally mounted plate 1. The plate 1 is pivoted about a point B. The first micrometer 14 serves to impart a linear motion to the movable block 7. It acts at a point L such that a line LB, defined by points L and B, is perpendicular to the plane in which the two linkages 8 lie. The second micrometer 114 serves to impart a rotary motion to the movable block 7. It acts at a point R such that a line RB, defined by the points R and B, is parallel to the plane in which the two linkages 8 lie. Thus, when the micrometer 14 is actuated, the plate 1 hinges about the line RB, similar to the first embodiment, and causes both of the linkages 8 of the pair to move together, resulting in linear movement of the block 7. Moreover, when the micrometer 114 is actuated, the plate 1 hinges about the line LB and causes relative movement between the two linkages 8 of the pair, resulting in rotary movement of the block 7.

[0041] A compression spring (not shown) holds the plate 1 in contact with the ends of the spindles of the micrometers 14 and 114. A bolt (not shown) is bolted into a part of the case 13 with the shank of the bolt passing through a through hole in the plate 1. The compression spring is helical and arranged over the shank of the bolt bearing at one end on the plate 1 in a region surrounding the rim of the through hole and at the other end on the head of the bolt, preferably via a washer.

[0042] When three pivot plate mechanisms of the kind shown in Fig. 11 are used, a six-axis positioner can be provided, allowing movement of the block 7 in three linear directions X, Y, & Z and three rotary directions, YAW, ROLL & PITCH. Moreover, by correct dimensioning of the linkages it is possible to arrange for the three rotary motions of the movable block 7, associated with the three respective plates, to occur around axes that intersect at a common point P, as is the case in the concrete example of the second embodiment described further below.

[0043] If only rotary movement is required, but no linear movement, the pivot plate can be substituted with a hinged plate hinged about the line LB and the actuator 14 dispensed with.

[0044] A practical example of a six-axis positioner according to the second embodiment is shown in Figs. 13 to 20 and will now be described, also with reference to Fig. 12.

[0045] As in the three axis positioner, the movable part of the positioner is made of two parts 6 and 7 for ease of manufacture.

[0046] There are three pairs of flexible linkages 8, 2 & 3, joined to the movable block 7 and their respective pivot plates 1, 4 and 9. The attachment points of the linkages to the plates are extended by tapered tubes beyond the plane of the plates themselves. This is done so that the rotations occur about a common point P in space. This is often desirable.

[0047] The moving plates are mounted pivotally at a point B allowing pivoting in two directions. There are two micrometers acting on the movable x-plate. One micrometer 14, for x-actuation, tilts the plate about an axis parallel to the plane of the linkages. This moves the linkages through the same distance, causing the block 7 and platform 6 to translate. The other micrometer 114, for yaw-actuation, tilts the plate about an axis perpendicular to the plane of the linkages. This moves the linkages through different distances, in this example equal but opposite distances, causing the block 7 and platform 6 to rotate about the point P.

[0048] Operation of the movable Y-plate 4 is similar to the movable X-plate.

[0049] The movable Z-plate 9 differs in that motion is transmitted to it via additional parts, namely two lever blocks, a ball-ended linkage and a lever plate. The result is essentially the same as if the micrometers acted directly on the plate, however the additional parts allow the micrometers to be mounted horizontally in convenient positions.

Reference Numerals**FIRST (SECOND) EMBODIMENT**

all 100+ numerals are for second embodiment

[0050]

1 hinged (pivoted) x-plate
 2 flexible y-linkages (y/roll linkages), 2 of
 3 flexible z-linkages (z/pitch linkages), 2 of
 4 hinged (pivoted) y-plate
 5 y-actuator
 105 roll-actuator
 6 platform [top plate]
 7 movable block
 8 flexible x-linkages (x/yaw linkages), 2 of
 9 hinged (pivoted) z-plate
 10 ball-ended driver plate linkage for z
 11 hinged driver plate for z
 12 z-actuator
 112 pitch-actuator
 13 case
 14 x-actuator
 114 yaw-actuator
 15 x-hinge
 16 y-hinge
 17 z-hinge
 18 linkage actuator-end rigid locating portion
 19 linkage carriage-end rigid locating portion
 20 linkage central rigid portion
 21 linkage actuator-end flexible portion
 22 linkage carriage-end flexible portion
 23 carriage linkage-locating means, in pairs
 24 hinged-plate linkage-locating means, in pairs
 25 hinged x-plate actuator-spindle contact region
 26 hinged y-plate actuator-spindle contact region
 27 hinged z-plate actuator-spindle contact region
 28 driver plate hinge
 29 x-actuator mounting means (part of case 13)
 129 yaw-actuator mounting means (part of case 13)
 30 y-actuator mounting means (part of case 13)
 130 roll-actuator mounting means (part of case 13)
 31 z-actuator mounting means (part of case 13)
 131 pitch-actuator mounting means (part of case 13)
 32 x-actuator drive spindle
 132 yaw-actuator drive spindle
 33 y-actuator drive spindle
 133 roll-actuator drive spindle
 34 z-actuator drive spindle
 134 pitch-actuator drive spindle
 35 base plate of case
 36 side plate of case 13 accommodating x- and z-actuator mounting means
 136 side plate of case 13 accommodating x- pitch- and yaw-actuator mounting means
 37 side plate of case 13 accommodating y-actuator mounting means

137 side plate of case 13 accommodating roll- y- and z-actuator mounting means
 140 tapered tube mount elongations
 141 pivot point indicator probe

5

Claims

- 10 1. A mechanism for a multi-axis flexure positioner, the mechanism including a fixed part (13) and a movable part (7), the movable part (7) being connected to the fixed part (13) via a plurality of transmission means, one for each axis, for transmitting actuation forces for the respective axes to the movable part (7), the transmission means for each axis including a flexure member arranged to transmit actuation forces for that axis to the movable part (7) and to flex between the fixed part (13) and the movable part (7) in response to actuation forces associated with the or each other axis, wherein there are three flexure members (2,3,8) arranged to extend along three mutually-perpendicular axes so that each flexure member is flexible along the axes of extent of the other two flexure members (2,3,8), each of the three flexure members (2,3,8) comprising a pair of flexure linkages arranged to extend parallel to each other, the three pairs of linkages thus defining three mutually-perpendicular planes.
- 15 2. A mechanism according to claim 1, wherein each of the transmission means comprises a plate (1) attached to the fixed part (13) via hinge means (15).
- 20 3. A mechanism according to claim 2, wherein the hinge means (15) defines a hinge axis aligned parallel to, and offset from, the plane defined by the associated pair of linkages, and perpendicular to the axis of extent of the associated pair of linkages, to allow linear movement of the movable part (7) relative to the fixed part (13).
- 25 4. A mechanism according to claim 2, wherein the hinge means (15) defines a hinge axis aligned perpendicular to the plane defined by the associated pair of linkages to allow rotary movement of the movable part (7) relative to the fixed part (13).
- 30 5. A mechanism according to any preceding claim in combination with one actuator (14) for each hinged plate (1), the or each actuator (14) being arranged to actuate the plate (1) and thus control movement of the flexure linkages associated with the hinged plate (1).
- 35 6. A mechanism according to any one of the preceding claims, wherein at least one of the transmission means comprises a plate (1) attached to the fixed part (13) via pivot means.
- 40
- 45
- 50
- 55

7. A mechanism according to claim 6, wherein the pivot means allows the plate (1) to rotate about two mutually perpendicular axes of rotation, a first one of said axes of rotation being parallel to, and offset from, the plane defined by the associated pair of linkages, and perpendicular to the axis of extent of the associated pair of linkages, and the second of said axes of rotation being perpendicular to the first rotational axis and the axis of extent of the associated pair of linkages, to allow both linear and rotary movement of the movable part (7) relative to the fixed part (13).
8. A mechanism according to claim 6 or 7 in combination with a pair of actuators (14,114) for each pivot plate (1), the or each pair of actuators (14,114) being arranged to actuate the plate (1) and thus control movement of the flexure linkages associated with the pivot plate (1) so that one of each pair of actuators (14,114) serves to provide linear movement, and the other of each pair of actuators (14,114) rotary movement, of the movable part (7) relative to the fixed part (13).
9. A mechanism according to any one of the preceding claims, wherein at least two of the transmission means provide for rotary movement of the movable part (7) relative to the fixed part (13) about respective axes of rotary movement, the mechanism being dimensioned and arranged so that the axes of rotary movement are mutually perpendicular.
10. A mechanism according to claim 9, the mechanism being dimensioned and arranged so that the at least two axes of rotary movement intersect at a common point.
11. A mechanism according to claim 10, wherein the linkages of one of the pairs of linkages are of a different length to the linkages of the other, or another, of the pairs of linkages, the linkages of each pair of linkages being of equal length.
12. A mechanism according to any one of the preceding claims, wherein at least two of the transmission means provide for linear movement of the movable part (7) relative to the fixed part (13) about respective axes of linear motion, the mechanism being dimensioned and arranged so that the axes of linear motion are mutually perpendicular.
13. A mechanism according to any one of the preceding claims, wherein at least one of the transmission means provides for linear movement of the movable part (7) relative to the fixed part (13) about an axis of linear motion and wherein at least one of the transmission means provides for rotary movement of the movable part (7) relative to the fixed part (13) about an axis of rotary motion, the mechanism being dimensioned and arranged so that the axes of linear and rotary motion are one and the same axis.
14. A mechanism according to any one of the preceding claims having a positioning precision of better than one of: 1 millimetre, 100 microns, 10 microns and one micron.

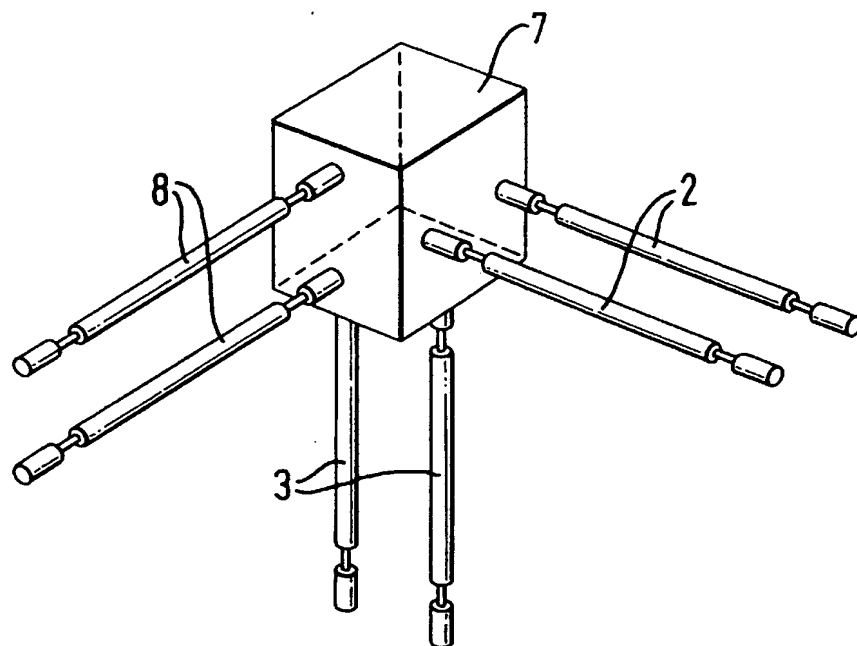


FIG. 1

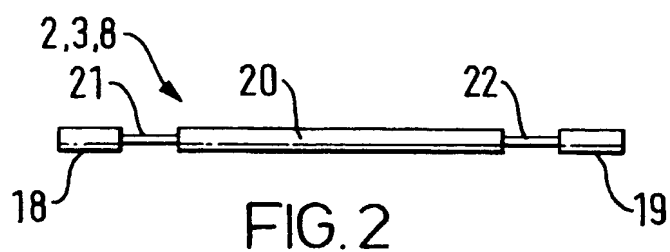


FIG. 2

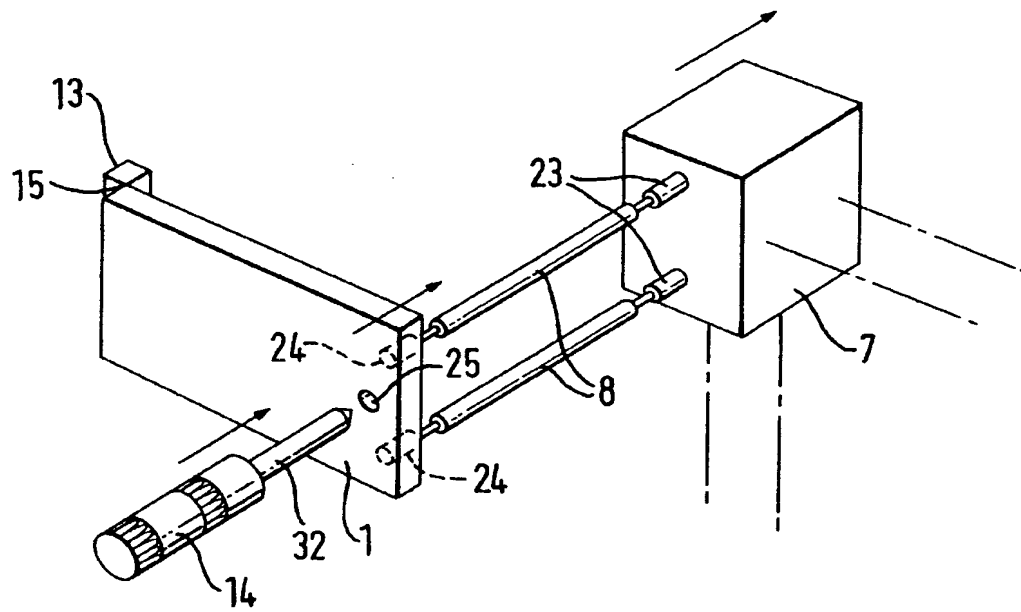
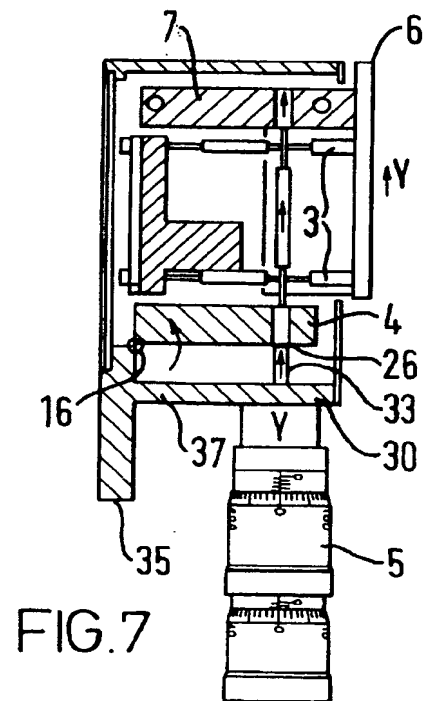
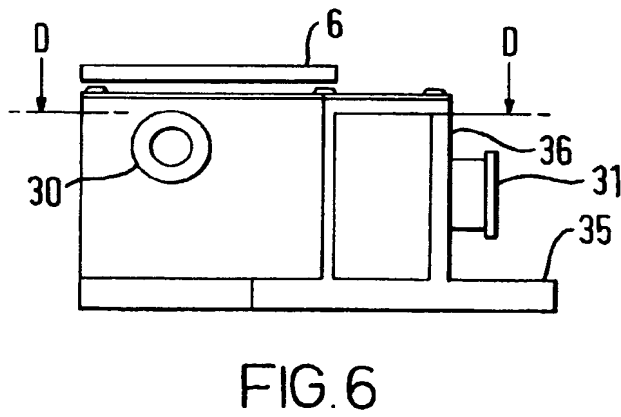
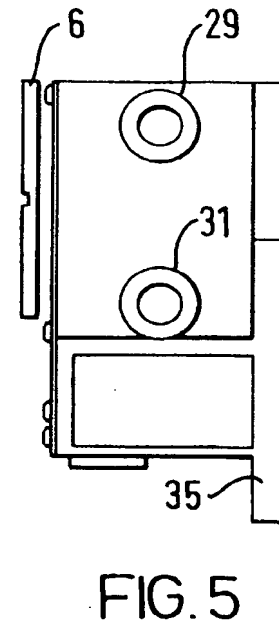
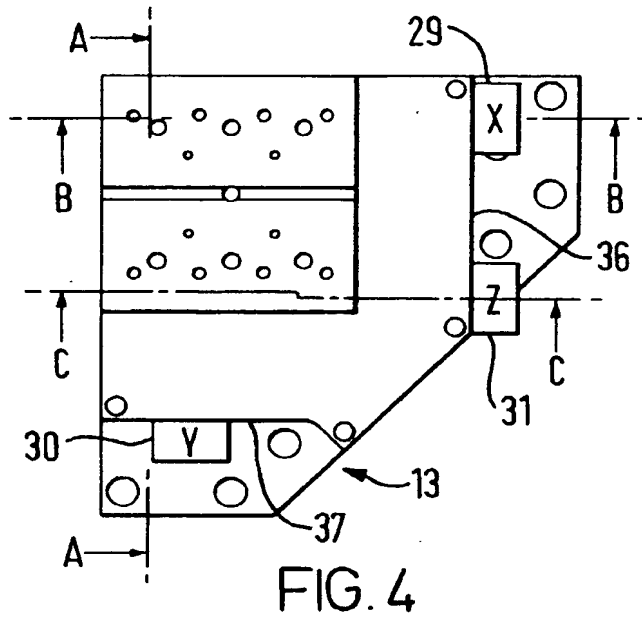
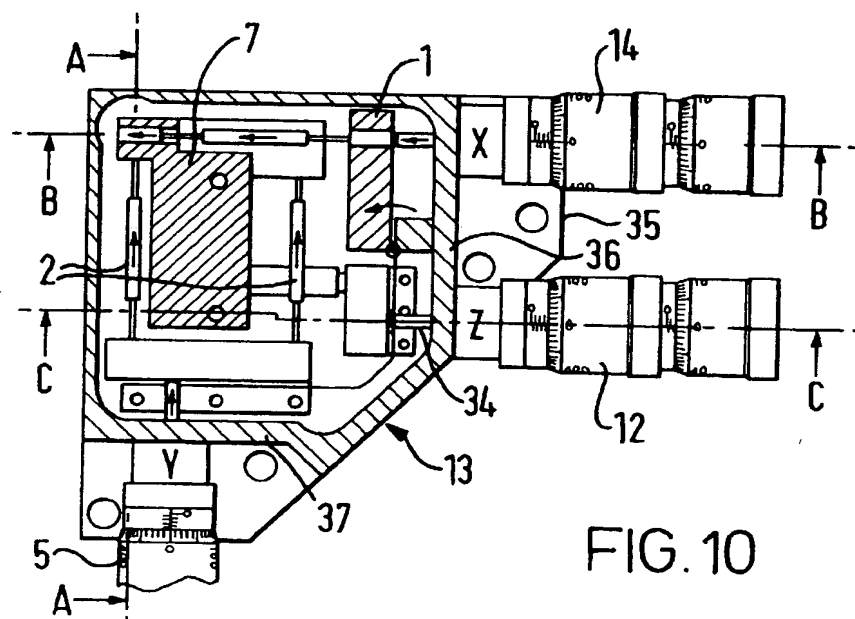
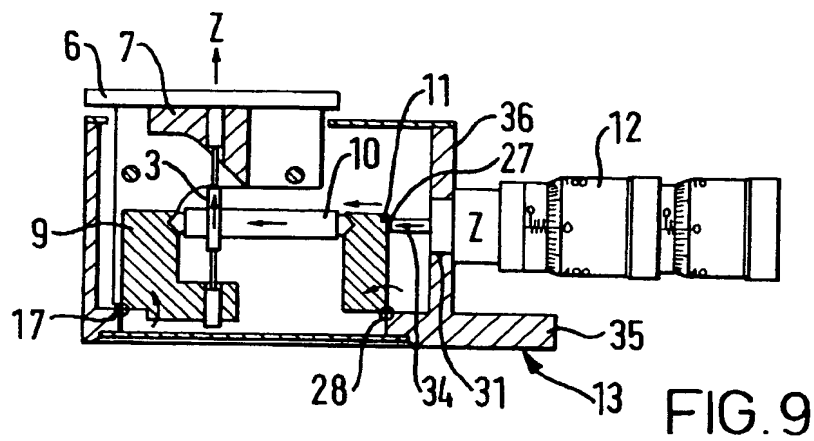
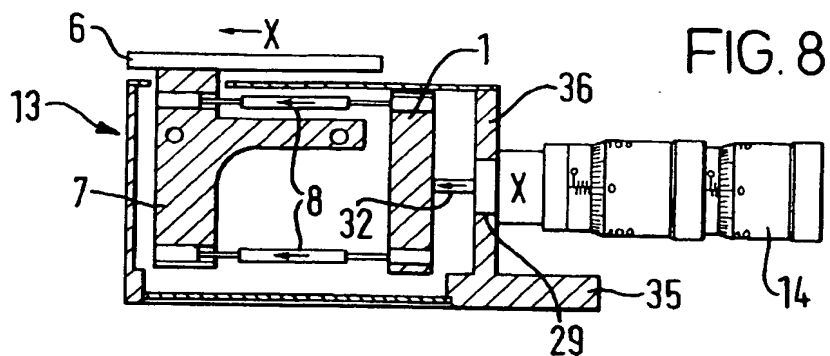


FIG. 3





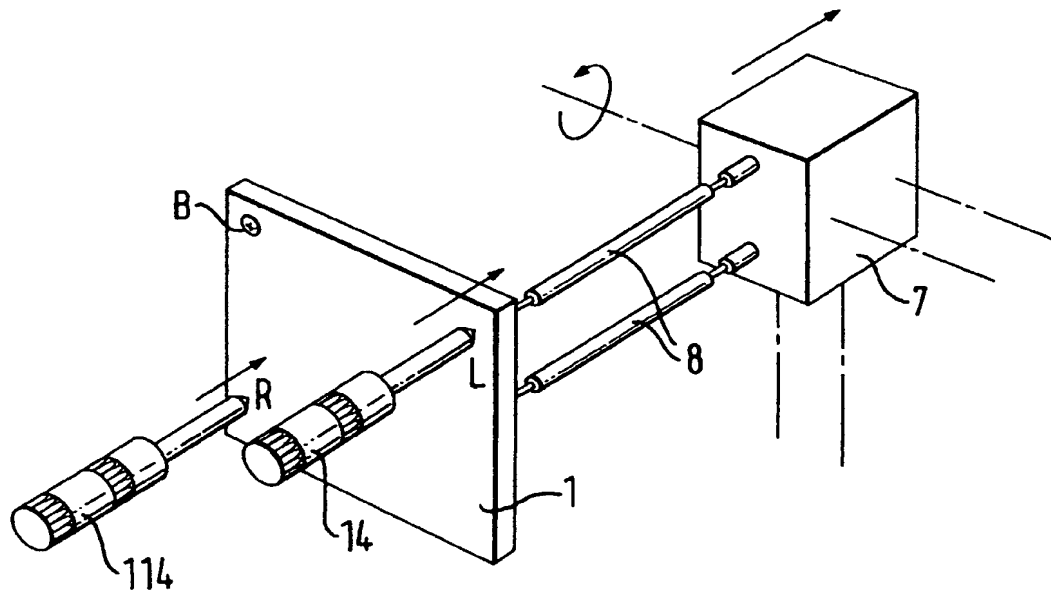


FIG. 11

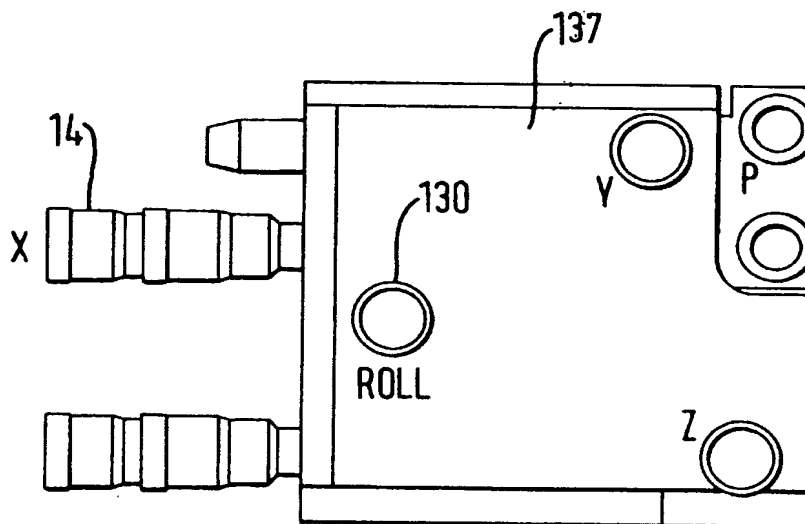
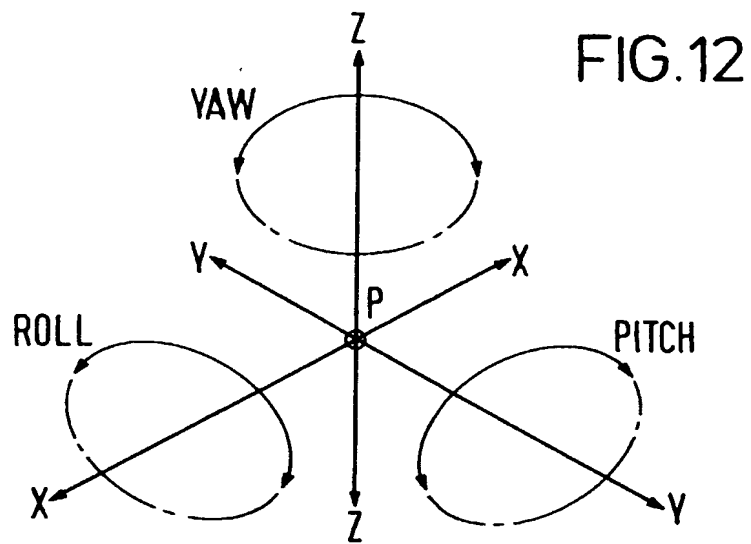


FIG.15

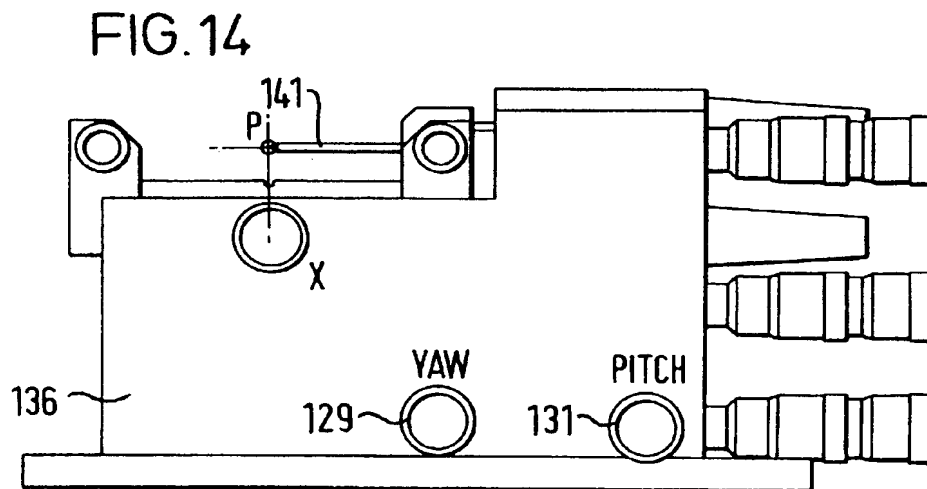
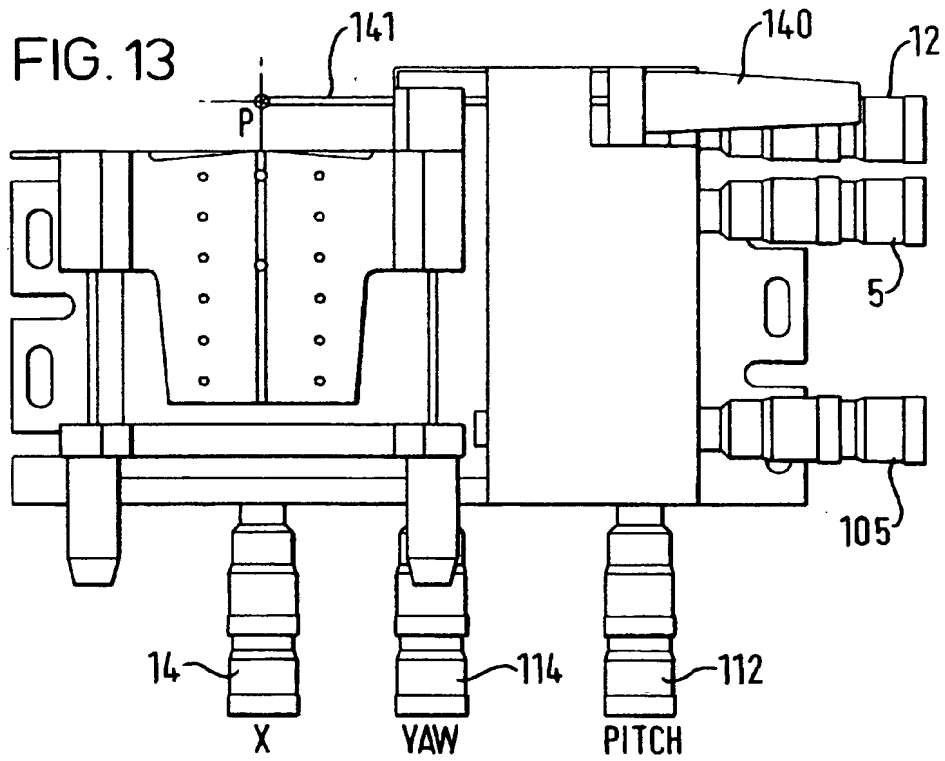


FIG. 16

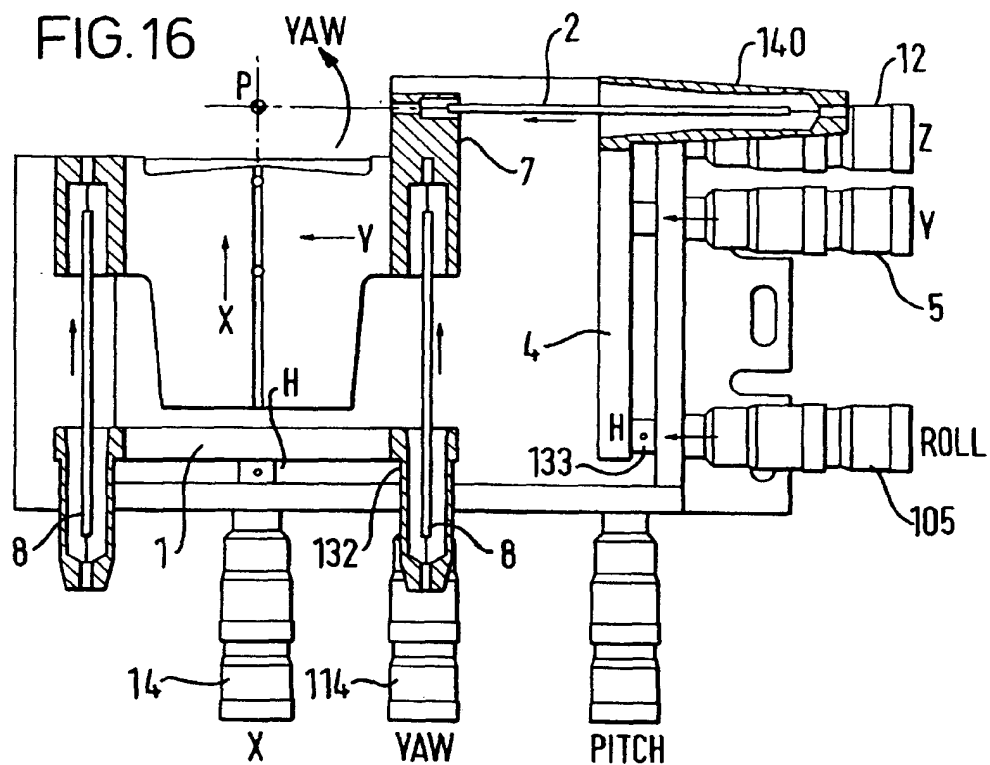
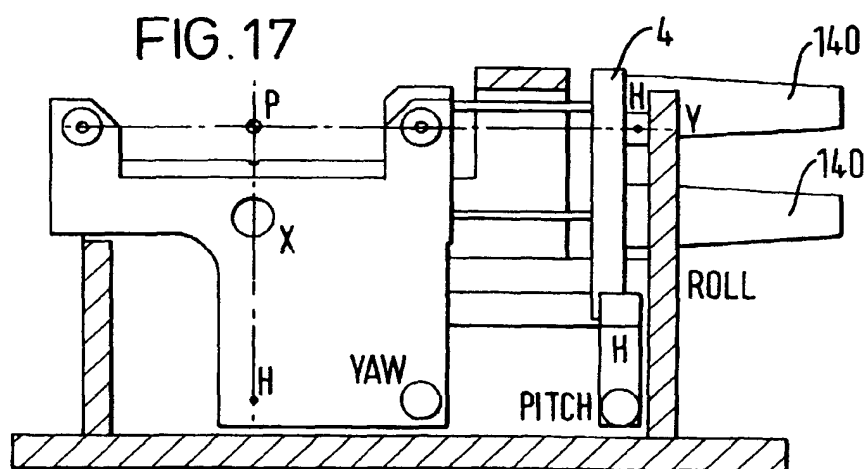


FIG. 17



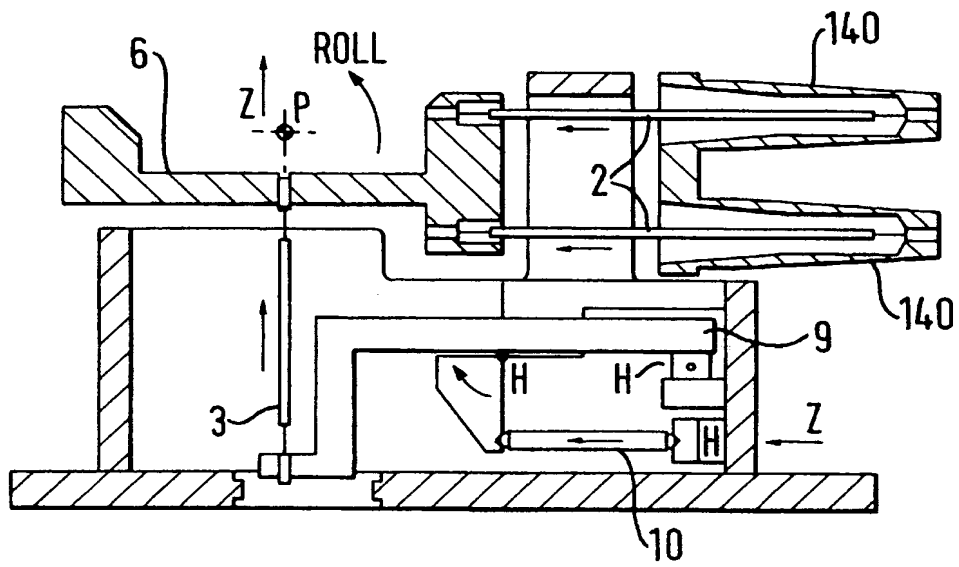


FIG.18

FIG. 19



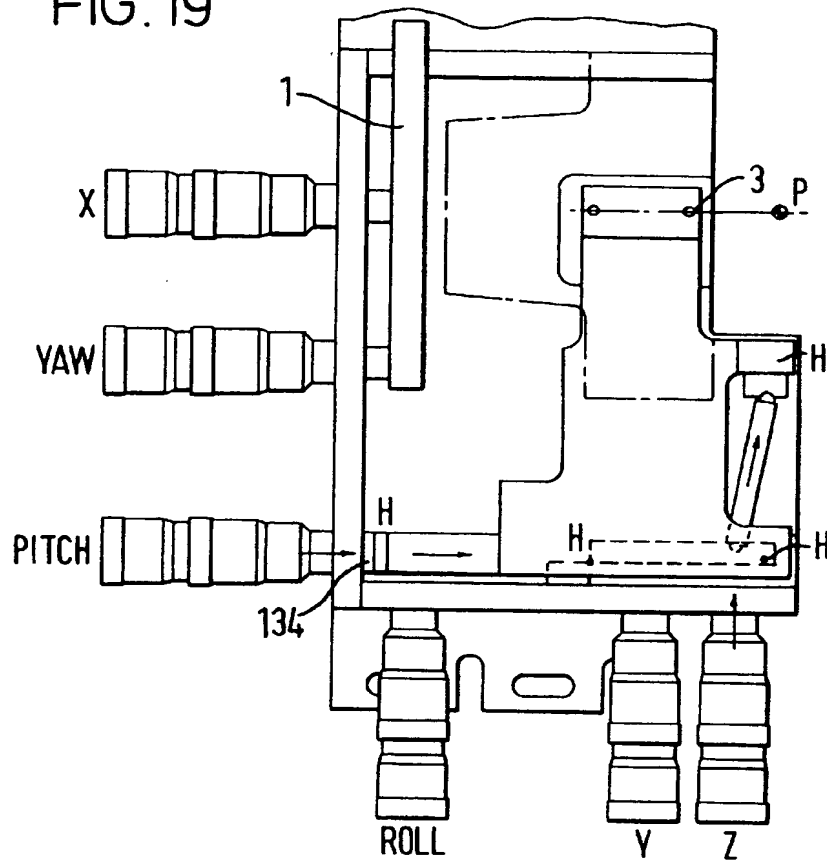


FIG. 20



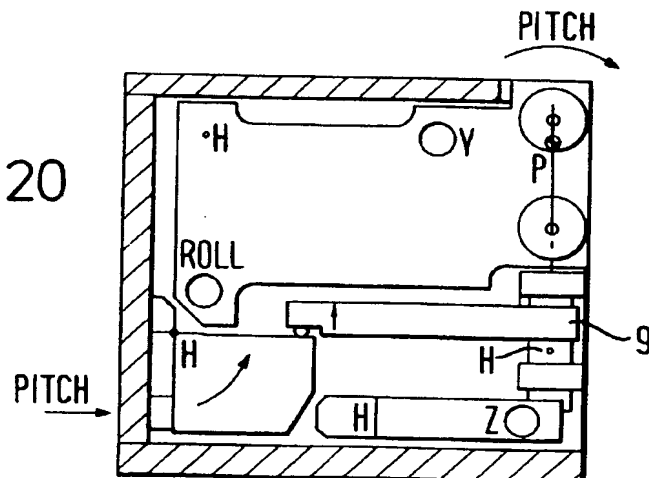

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 937 961 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
23.05.2001 Bulletin 2001/21

(51) Int Cl.7: **G01B 5/00**, B23Q 1/36,
G02B 6/38

(43) Date of publication A2:
25.08.1999 Bulletin 1999/34

(21) Application number: **99301102.2**

(22) Date of filing: **16.02.1999**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Davies, Philip Andrew**
Cambridge CB1 3QJ (GB)

(74) Representative: **Haines, Miles John**
D. Young & Co.
21 New Fetter Lane
London EC4A 1DA (GB)

(30) Priority: **20.02.1998 GB 9803716**

(71) Applicant: **Melles Griot Limited**
London W1N 9AF (GB)

(54) **Positioning mechanism**

(57) A mechanism for a multi-axis flexure positioner includes a fixed part and a movable part (7), the movable part (7) being connected to the fixed part via a plurality of transmission means, one for each axis, for transmitting actuation forces for the respective axes to the movable part (7). The transmission means for each axis includes a flexure member (2,3,8) arranged to transmit actuation forces for that axis to the movable part (7) and to flex between the fixed part and the movable part in

response to actuation forces associated with the or each other axis. There are three flexure members (2,3,8) arranged to extend along three mutually-perpendicular axes so that each flexure member (2,3,8) is flexible along the axes of extent of the other two flexure members (2,3,8). Each of the three flexure members (2,3,8) comprises a pair of flexure linkages arranged to extend parallel to each other, the three pairs of linkages thus defining three mutually-perpendicular planes.

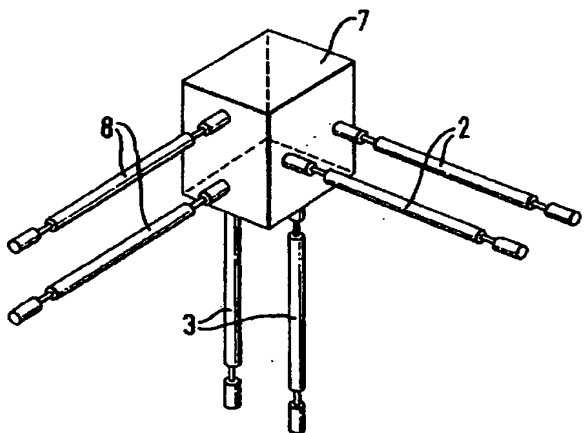


FIG.1

EP 0 937 961 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 30 1102

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	US 4 523 383 A (ROGERS MICHAEL J ET AL) 18 June 1985 (1985-06-18)	1-3,5,6, 12,14	G01B5/00 B23Q1/36
Y	* column 2, line 1 - column 3, line 53; figures 2,3 *	4,8-11, 13,14	G02B6/38
X	US 5 029 398 A (ERTL FRITZ) 9 July 1991 (1991-07-09)	1-3,5,6, 12,14	
	* column 6, line 16 - column 7, line 31; figure 5 *		
Y	US 4 637 777 A (SMULDERS HENDRICUS F G ET AL) 20 January 1987 (1987-01-20)	4,8-11, 13,14	
	* column 4, line 39 - column 5, line 8; figure 3 *		
	* column 1, line 68 *		
A	WO 92 12450 A (NEW FOCUS INC) 23 July 1992 (1992-07-23)	7,8	
	* abstract; figures 3-5 *		
A	US 4 691 586 A (VAN LEIJENHORST HARRO M ET AL) 8 September 1987 (1987-09-08)	1	
	* column 17, line 5 - line 22; figures 1-10 *		
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			B23Q G01B G02B
Place of search		Date of completion of the search	Examiner
BERLIN		2 April 2001	von Moers, F
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (03.02) (P4/C3)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 1102

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-04-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4523383 A	18-06-1985	DE 3380445 D	28-09-1989
		EP 0102744 A	14-03-1984
		WO 8400605 A	16-02-1984
		JP 4049644 B	12-08-1992
		JP 59501679 T	04-10-1984
US 5029398 A	09-07-1991	DE 3905952 A	30-08-1990
		CH 679805 A	15-04-1992
		FR 2643708 A	31-08-1990
		GB 2229534 A,B	26-09-1990
		IT 1238042 B	23-06-1993
US 4637777 A	20-01-1987	NL 8402765 A	01-04-1986
		EP 0177993 A	16-04-1986
		JP 61071982 A	12-04-1986
WO 9212450 A	23-07-1992	US 5140470 A	18-08-1992
		AU 1197592 A	17-08-1992
		EP 0566660 A	27-10-1993
		JP 6507026 T	04-08-1994
US 4691586 A	08-09-1987	NL 8500615 A	01-10-1986
		AT 42232 T	15-05-1989
		DE 3662849 D	24-05-1989
		DE 193991 T	18-12-1986
		EP 0193991 A	10-09-1986
		JP 1518821 C	29-09-1989
		JP 61223709 A	04-10-1986
		JP 63062721 B	05-12-1988

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82